


|           | A                | B                | C                | D                | E                |
|-----------|------------------|------------------|------------------|------------------|------------------|
| Positions | ±0.25<br>(0.010) | ±0.13<br>(0.005) | ±0.38<br>(0.015) | ±0.25<br>(0.010) | ±0.25<br>(0.010) |
| 15        | 16.92<br>0.666   | 24.99<br>0.984   | 30.81<br>1.213   | 19.28<br>0.759   | 16.33<br>0.643   |
| 26        | 25.25<br>0.994   | 33.32<br>1.312   | 39.14<br>1.541   | 27.65<br>1.089   | 24.66<br>0.971   |
| 44        | 38.96<br>1.534   | 47.04<br>1.852   | 53.04<br>2.088   | 41.30<br>1.626   | 38.38<br>1.511   |
| 62        | 55.42<br>2.182   | 63.50<br>2.500   | 69.32<br>2.729   | 57.43<br>2.261   | 54.84<br>2.159   |

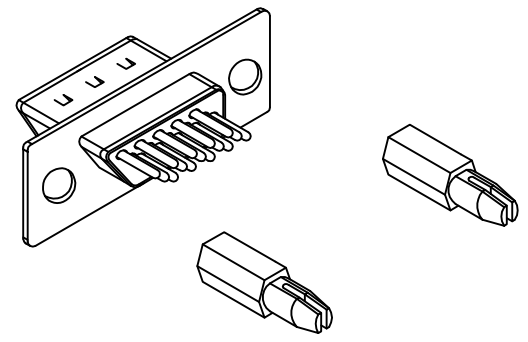

**SPECIFICATIONS**

Insulator :PBT+30% glass fiber , UL 94V-0  
 Contact : Brass or Phosphor bronze  
 Current rating (Max) : 3 amp AC / DC  
 Withstanding voltage : 1000 VAC  
 Insulation resistance (Min.):1000MΩ  
 Contact resistance (Max):30MΩ  
 Operating temperature : -55°C~+105°C

**易昕企業有限公司**  
LEAMAX ENTERPRISE CO., LED.

|      |       |                               |              |                  |            |
|------|-------|-------------------------------|--------------|------------------|------------|
| PROJ |       | SCALE : F<br>DO NOT SCALE DWG | MOLD NO 3227 |                  |            |
| APP  | AMY   | 92.07.08                      | MODEL        | FILE NO<br>CODE4 | REV.<br>X1 |
| CHK  | CCJ   | 89.11.01                      | UNIT         | SHT 1 OF 1       | SIZE<br>A4 |
| DGN  | WU    | 89.11.01                      |              |                  |            |
| DRW  | SHEIH | 89.11.01                      | MM           |                  |            |