
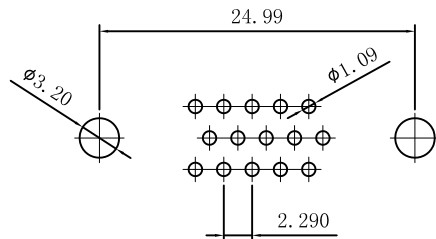
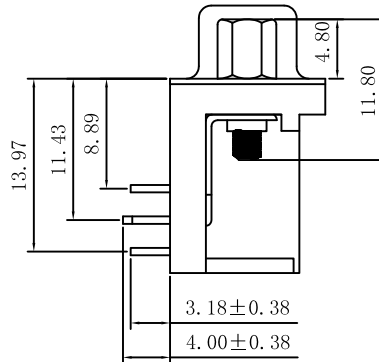
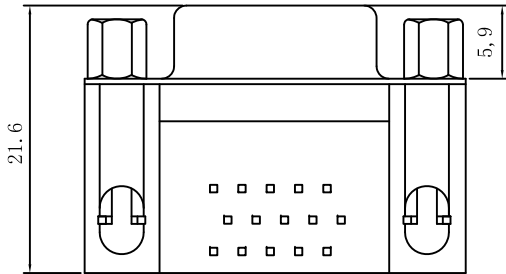


REV.	NOTES	DATE
A	RELEASED	21-04-17

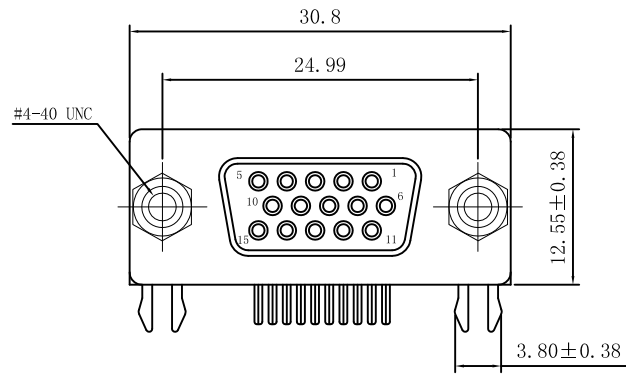

Electrical Characteristics:

1. Current Rating: 5 AMP
2. Withstanding Voltage: AC 500V for 1 Minute.
3. Insulation Resistance: 1000MW Min. at DC 500v.
4. Contact Resistance: 30mΩ Max.
5. Operating Temperature: -40° C to +85° C.

Material:

1. Insulator: PBT+30% Glass Fiber(UL94v-0).
2. Contact: Brass
3. Contact plated: Gold Plated Tin Plated
4. Shell: Steel Nickel Plated
5. Housing color: Black OR Blue

Order Information


PART NO. 3228-15RSx1HE

Housing Color ——— Contact Plating
 B: Black H: Gold Plated Tin Plated
 L: Blue

DIMENSIONS TOLERANCE

METRIC

.0= ±.38
 .00= ±.25
 .000= ±.15
 .0000= ±
 ANG. = ±2°

UNITS	mm	 易昕企業有限公司 LEAMAX ENTERPRISE CO., LED.
QT'Y	N/A	
MT'L	SEE NOTE	TITLE
FINISH	SEE NOTE	15P三排8.89母直鎖 RoHS
DWG.	WANG 21-04-17	DWG NO. 3228-SA1
CKD.	HUANG 25-09-17	PN:3228-15RSx1HE
APPD.	CHEN 25-09-17	SCALE 1/1 SIZE A4 SHEET 1 REV. A