



REV	ZONE	REVISION	DATE

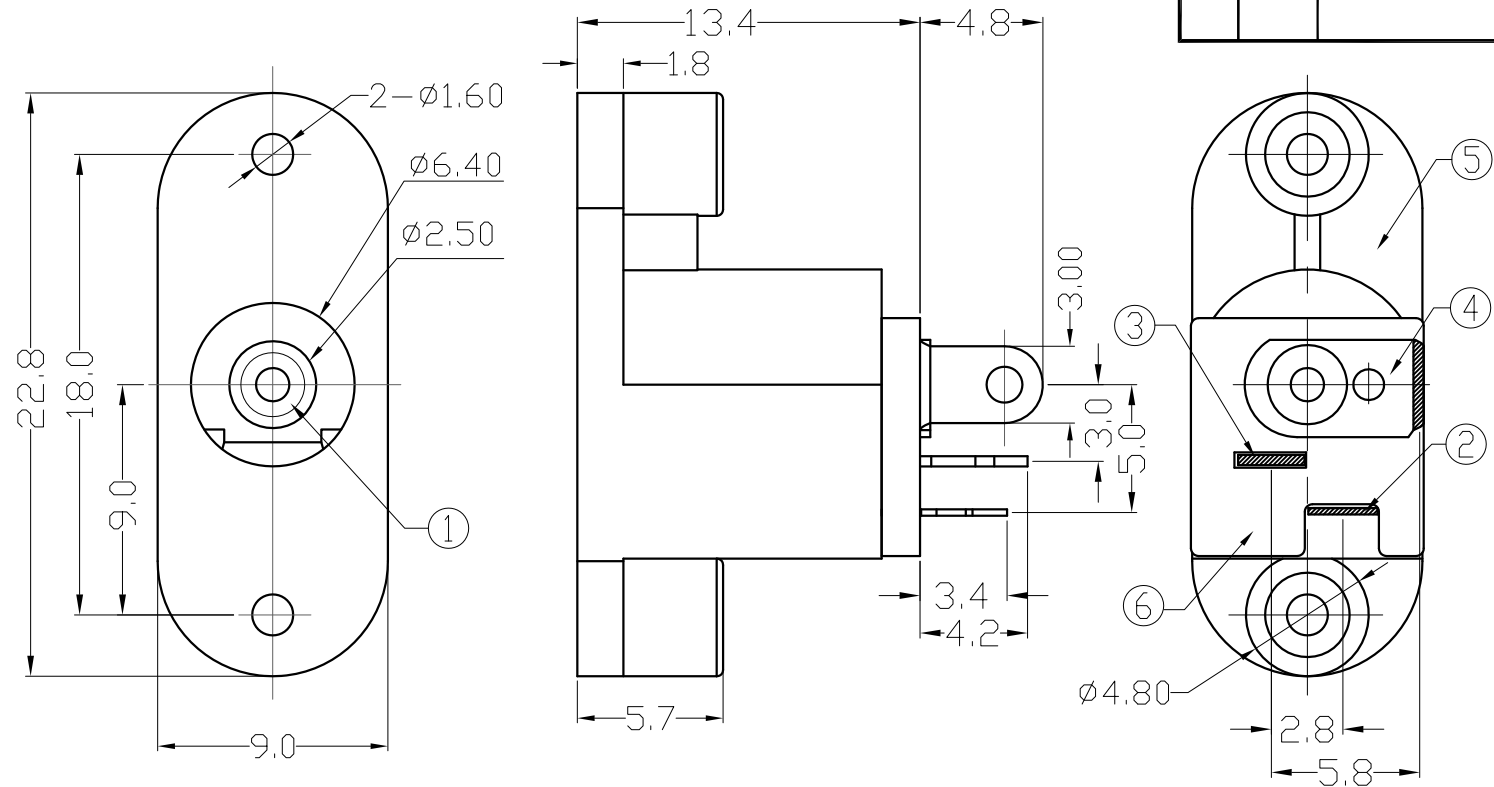

Green Product



NO.	NAME	MATERIAL	FINISH	Q'TY
1	CENTER PIN	BRASS ϕ 2.5	NICKEL PLATED	1
2	BERAK TERM.	PHOS. BRONZE 0.25	TIN PLATED	1
3	BERAK TERM.	BRASS 0.40	TIN PLATED	1
4	PIN TERM.	BRASS 0.40	TIN PLATED	1
5	HOUSING	PBT G.F.	BLACK	1
6	COVER	BAKELITE	BLACK	1

Specification:
 Contact Resistance: 30m Ohm Max. At AC 100mA Max .1KHz
 Insulation Resistance: 100M Ohm Min. At 500V DC
 Rated Voltage And Current: DC12V. 2A Max; AC 100V. 1A Max
 Dielectric Withstanding Voltage: 500V AC for 1 Minute
 Insertion Force: 3.0Kg Maximum.
 Extraction Force: 0.3Kg Minimum.



易昕企業有限公司
 LEAMAX ENTERPRISE CO., LED.

Drawing No			UNIT	SCALE	TITLE	
3279-004			mm	1:1	DC POWER JACK	
APPD.	CKD.	DWG.	DATE	TOLERANCE		PART NO.
JAMES 14-08-14	SHIRLEY 02-08-14	SRNA 19-04-07	19-04-07	X. \pm 0.38	.X \pm 0.25	3279-DBE
				.XX \pm 0.13	.XXX \pm 0.05	

MODEL 3279-DBE PAGE 1 OF 1