

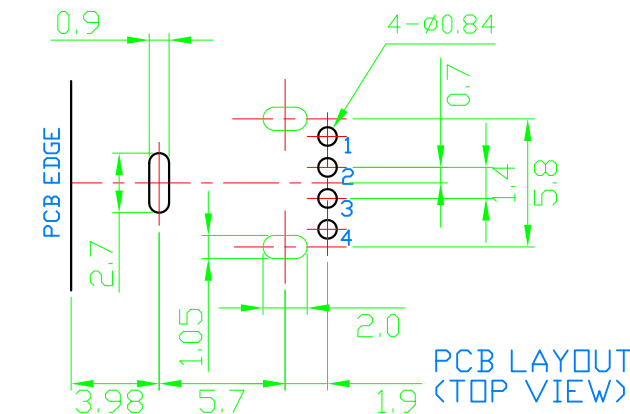


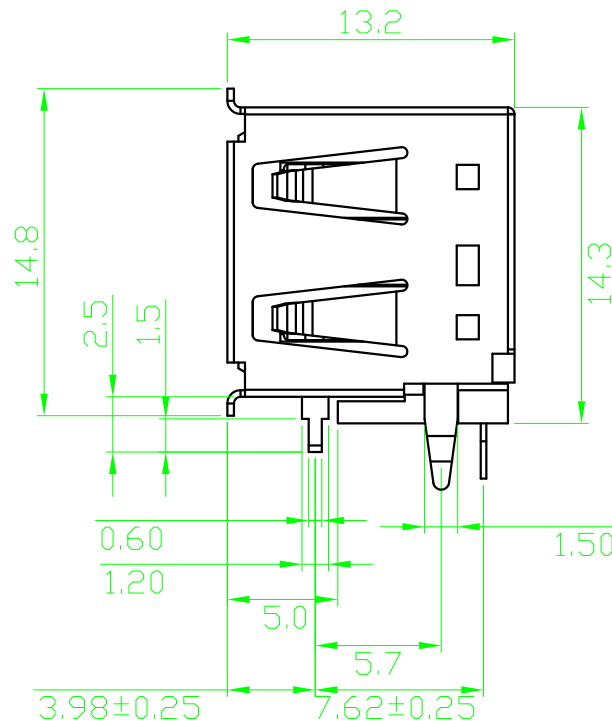

Specification:
 Contact Resistance: 30m Ohm Max.
 Insulation Resistance: 1000M Ohm Min. At 500VDC.
 Rated Voltage And Current: 1.5A At 250VAC Minimum.
 Dielectric Withstanding Voltage: 750V AC (rms) for 1 Minute(Rev. 1.1)
 Durability (Life Test): 1500 Cycles
 Insertion Force: 35 Newton Maximum.
 Extraction Force: 10 Newton Minimum.

**Green
Product**

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	NYLON PA9T G.F.	WHITE	1	
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold:1~3u" ; NI:40~60u" ; TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	

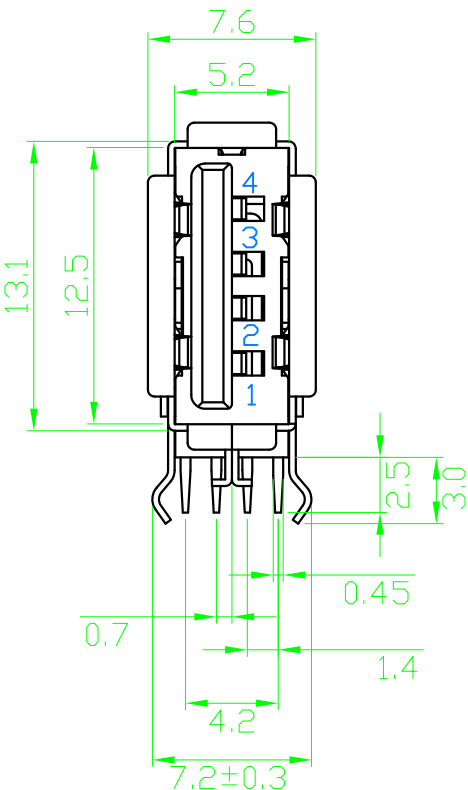

易昕企業有限公司
LEAMAX ENTERPRISE CO., LED.

MODEL 3210-SR1E-01UW PAGE 1 OF 1

Drawing No

3210-AD1

UNIT

mm

SCALE

1:1

TITLE

USB A TYPE FLAT 4 PIN DIP

APPD.

JAMES
10-09-13

CKD.

SHIRLEY
01-07-13

DWG.

TINA
02-02-10

DATE

02-02-10

TOLERANCE

X. ±0.38
.X ±0.25
.XX ±0.13
.XXX ±0.05

PART NO.

3210-SR1E-01UW

REV.

A0