


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

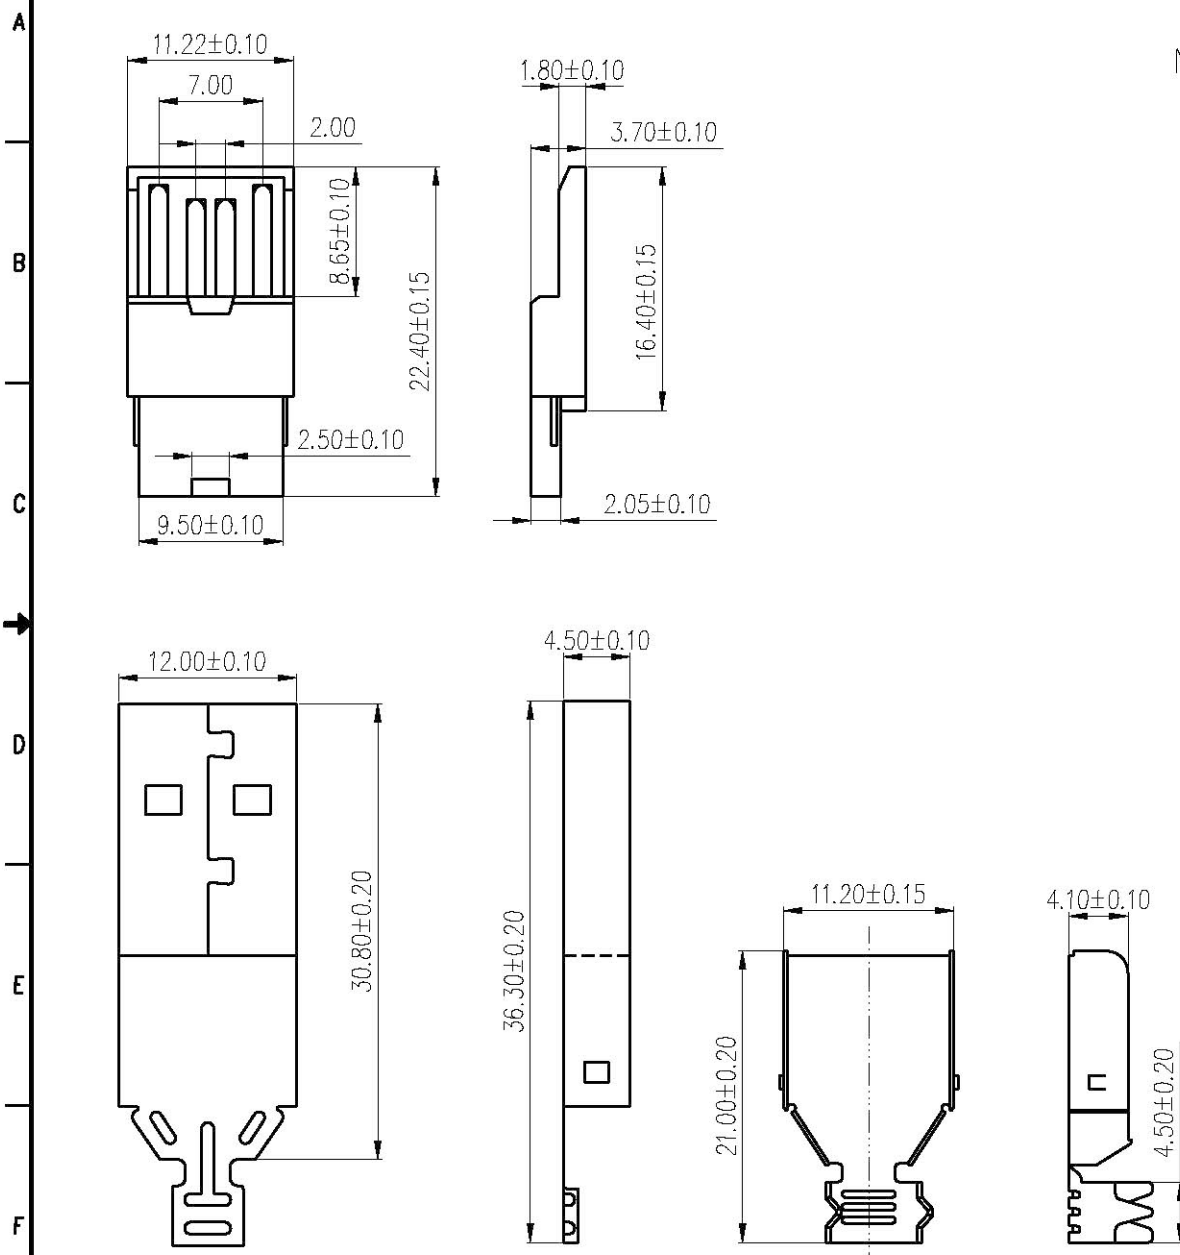

Note:

1.Material:

- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass ,t=0.25mm.
- 1.3 Shell: Cold Rolled Steel,t=0.35mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts: Gold flashed 1u", 30u".
- 3.2 Shell: Nickel plated.

ORDER INFORMATION:

PN: 3211-MSE-xxUx  
 Contact: 01:G/F 1u" 30:30u"  
 Housing Color: B:Black W:Ivory (White)

No.	Name	Q'ty	Material	Remarks&Thickness	Finish
4	Back-shell	1	Cold Rolled Steel	T=0.35mm	Nickel Plated
3	Front-shell	1	Cold Rolled Steel	T=0.35mm	Nickel Plated
2	Contact	4	Brass	T=0.20mm	Gold Flashed
1	Housing	2	P.B.T	UL 94-V0	Black/Ivory

UNIT: mm	SIZE: M4	MATERIAL:	<b>易昕企業有限公司</b> LEAMAX ENTERPRISE CO.,LTD.
SCALE 2:1	SHEET 1 / 1	FINISH:	
TOLERANCE UNSPECIFIED		COLOR:	TITLE: USB A TYPE SOLDER(M)三件式
.x	±0.30	APP: Chen 11-10-17	DWG NO. 3211-202 PN: 3211-MSE-xxUx
.xx	±0.20	CHK: Huang 01-09-16	
.xxx	±0.10	DRA: Kent 06-04-06	
ANG.	±1°		REV: A1