


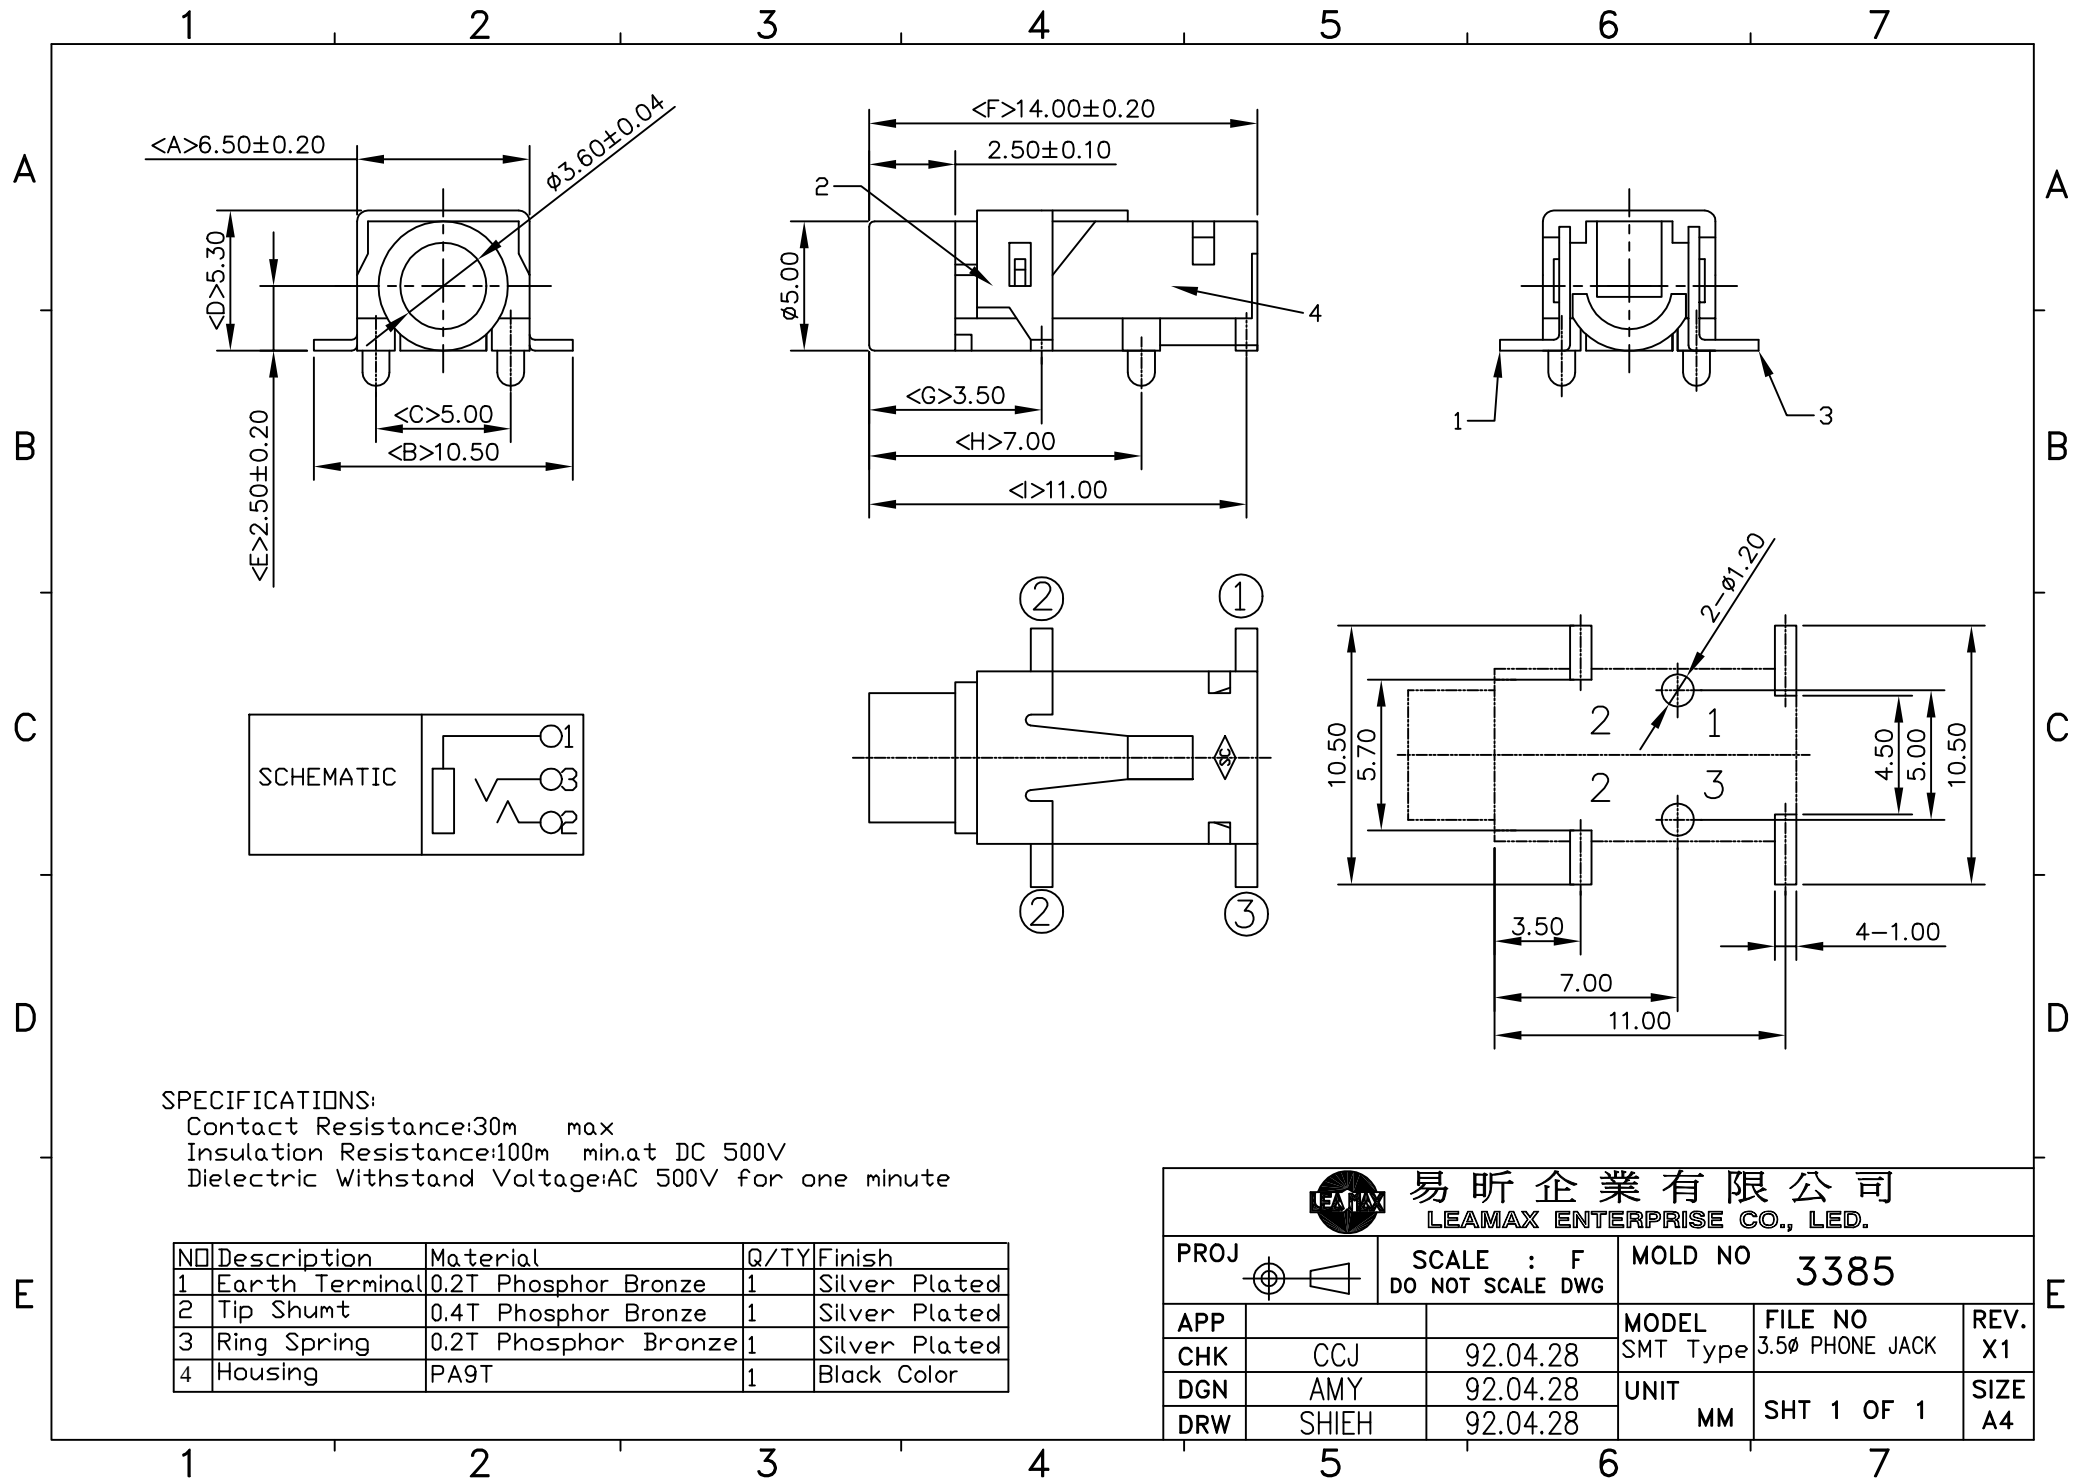

SPECIFICATIONS:

Contact Resistance:30m max
Insulation Resistance:100m min.at DC 500V
Dielectric Withstand Voltage:AC 500V for one minute

NO	Description	Material	Q/TY	Finish
1	Earth Terminal	0.2T Phosphor Bronze	1	Silver Plated
2	Tip Shunt	0.4T Phosphor Bronze	1	Silver Plated
3	Ring Spring	0.2T Phosphor Bronze	1	Silver Plated
4	Housing	PA9T	1	Black Color

LEAMAX 易昕企業有限公司 LEAMAX ENTERPRISE CO., LED.					
PROJ		SCALE : F DO NOT SCALE DWG		MOLD NO 3385	
APP			MODEL	FILE NO	REV.
CHK	CCJ	92.04.28	SMT Type	3.5Φ PHONE JACK	X1
DGN	AMY	92.04.28	UNIT		SIZE
DRW	SHIEH	92.04.28	MM	SHT 1 OF 1	A4