
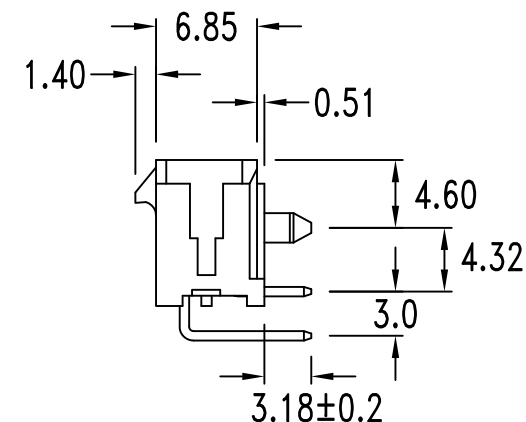



REV	ECN NO.	DESCRIPTION	DATE	APP'D
C/D		RELEASE TO PRODUCTION		Paul

Features:

- Available in 2 thru 24 circuits
- Material: Nylon 6T or 9T
- .0246"(0.625mm) square pin
- Tin-plated brass pin
- Mates with 4312-2xxHME housing
- Standard color: Black

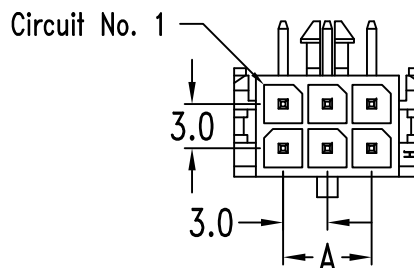

Specifications:

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A





- Voltage rating: 250V
- Contact resistance: 10mΩ Max.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C Max. (carry rated current load)

2P

4P

6P

8P ~ 24P



Dimensional Information

PCB Layout: Component side

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		6.65	6	6.0	12.65	10	12.0	18.65	14	18.0	24.65	18	24.0	30.65	22	30.0	36.65
4	3.0	9.65	8	9.0	15.65	12	15.0	21.65	16	21.0	27.65	20	27.0	33.65	24	33.0	39.65

Order Information

P N : 4 3 1 2 - 2 x x P R E

Serial Type

No. of Contact
02~24 PIN

Right Angle Type

With Mtg. Pegs

TOLERANCE

.000 ± 0.05 (mm)
.00 ± 0.15 (mm)
.0 ± 0.25 (mm)

APPROVALS

DRAWN

Daniel

CHK'D

Huang

APP'D

Chen

DATE

20-08-03

03-06-14

07-05-15

UNTS mm

SCALE



易昕企業有限公司
LEAMAX ENTERPRISE CO., LTD.

TITLE:
.118" (3.00mm) Dual Row Right Angle Header

DWG NO.4312-2R1

SIZE: A4

SHEET 1 OF 1

REV. C/D