

REV	ECN NO.	DESCRIPTION	DATE	APP'D
C/D		RELEASE TO PRODUCTION		Paul

Features:

- Available in 2 thru 24 circuits
- Material: UL 94V-0 Nylon 66
- Accepts 4312-MT Terminal
- Mates with 4312-2xxHME Housing
- Standard color: Black
- Recommended panel thickness: 1.57mm
- RoHS

Specifications:

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Insulation resistance: 1000M Ω Min.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C Max.
(carry rated current load)

Dimensional Information

Circuits	Dim. A	Dim. B	Dim. C	Dim. D	Circuits	Dim. A	Dim. B	Dim. C	Dim. D
2		4.0	4.21	7.90	14	18.0	22.0	22.20	25.88
4	3.0	7.0	7.21	10.90	16	21.0	25.0	25.20	28.88
6	6.0	10.0	10.21	13.89	18	24.0	28.0	28.20	31.88
8	9.0	13.0	13.21	16.89	20	27.0	31.0	31.22	34.87
10	12.0	16.0	16.21	19.89	22	30.0	34.0	34.22	37.87
12	15.0	19.0	19.21	22.89	24	33.0	37.0	37.22	40.87

Order Information

P N : 4 3 1 2 - 2 x x H F E


Serial Type

No. of Contact
02~24 PIN


H: Housing

F: Female

E: With Mounting ears

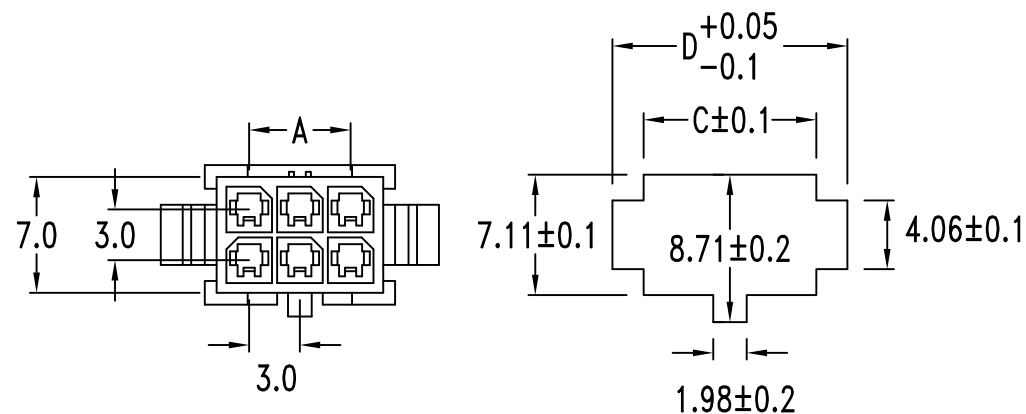

PANEL OPENING

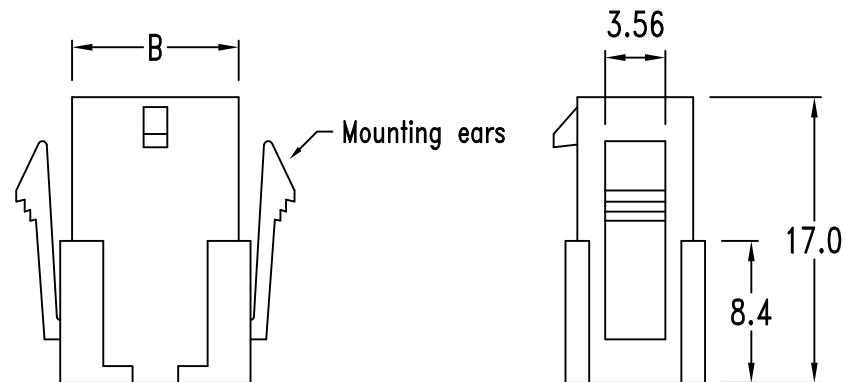

TOLERANCE	APPROVALS		DATE	 易昕企業有限公司 LEAMAX ENTERPRISE CO., LTD.					
	DRAWN	Daniel	29-07-00						
	CHK'D	Huang	01-04-15	TITLE:	.118" (3.00mm) Dual Row Plug Housing				
	APP'D	Chen	25-05-15	DWG NO.4312-HFD					
	UNTS	mm	SCALE	1:1	SIZE:	A4	SHEET	1 OF 1	REV.

TITLE: .118"(3.00mm) Dual Row Plug Housing

DWG NO.4312-HFD