
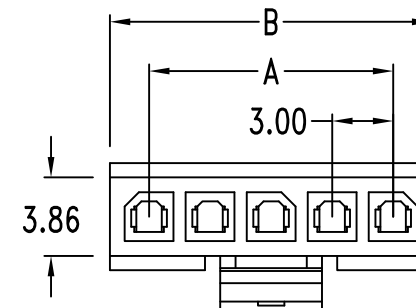


REV	ECN NO.	DESCRIPTION	DATE	APP'D
C/D		RELEASE TO PRODUCTION		Paul

Features:

- Available in 2 thru 12 circuits
- Material: UL 94V-0 Nylon
- Accepts 4312-FT Terminal
- Mates with 4312-1xxHFE Housing
- Standard color: Black





Specifications:

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Insulation resistance: 1000M Ω Min.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C Max.
(carry rated current load)

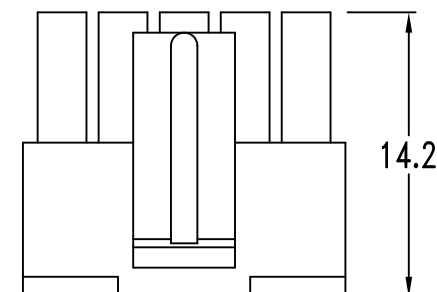

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	3.0	7.0	4	9.0	13.0	6	15.0	19.0	8	21.0	25.0	10	27.0	31.0	12	33.0	37.0
3	6.0	10.0	5	12.0	16.0	7	18.0	22.0	9	24.0	28.0	11	30.0	34.0			

Order Information

P N : 4 3 1 2 - 1 x x H M E

Serial Type _____ E: RoHS
 No. of Contact _____
 02~12 PIN _____
 H: Housing _____
 M: Male _____

TOLERANCE	APPROVALS	DATE	易昕企業有限公司 LEAMAX ENTERPRISE CO., LTD.			
.000 $\pm$ 0.08 (mm)	DRAWN Daniel	10-09-01	TITLE: .118"(3.00mm) Single Row Receptacle Housing			
.00 $\pm$ 0.25 (mm)	CHK'D Huang	01-04-15				
.0 $\pm$ 0.4 (mm)	APP'D Chen	07-05-15	DWG NO.4312-HMA			
	UNTS mm	SCALE 1:1	SIZE:A4	SHEET 1 OF 1	REV. C/D	