

Features:

- Material: Phosphor Bronze
- Used in 4312-2xxHME Series Housing
- Wire range: #26 ~ #30 AWG
- Thickness: 0.2mm

Specifications:

- Current rating:


Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Contact resistance: 10m Ω max.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.
(carry rated current load)

Order Information

Part No.	Finished	Wire size	Dim. a	Dim. b	Dim. c	Dim. d
4312-FT	Tin-plated	#26 ~ #30 AWG	1.8	1.6	2.4	1.9

REV	ECN NO.	DESCRIPTION	DATE	APP'D
C/D		RELEASE TO PRODUCTION		Paul

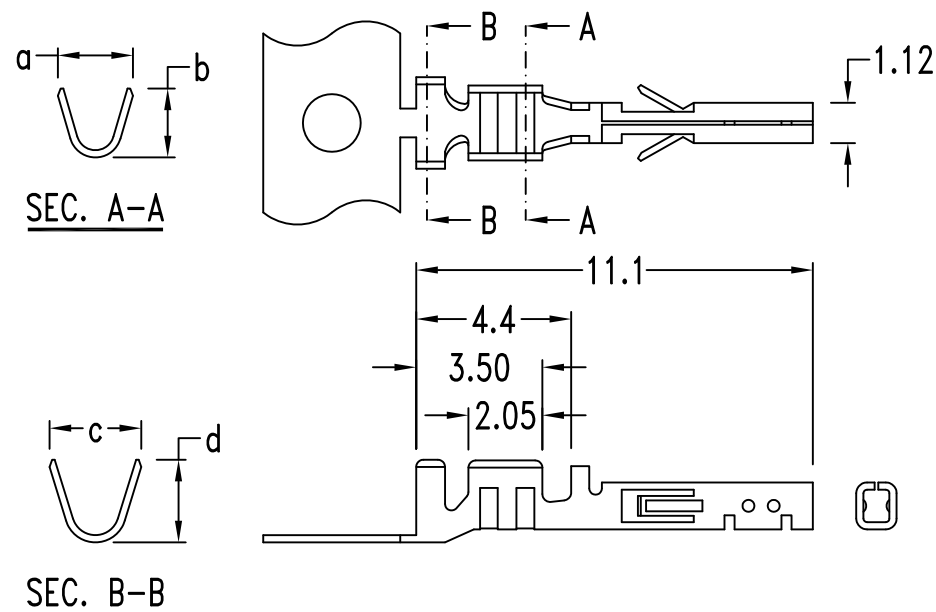

TOLERANCE	APPROVALS		DATE	 易昕企業有限公司 LEAMAX ENTERPRISE CO., LTD.		
	DRAWN					
	Daniel		29-07-00	TITLE: .118" (3.00mm) Crimp Terminal		
	CHK'D					
	Huang		04-05-15	DWG NO. 4312-TF1		
.000 ± 0.05 (mm)	APP'D					
.00 ± 0.15 (mm)	Chen		25-05-15			
.0 ± 0.25 (mm)	UNTS mm		SCALE 1:1	SIZE: A4	SHEET 1 OF 1	REV. C/D