

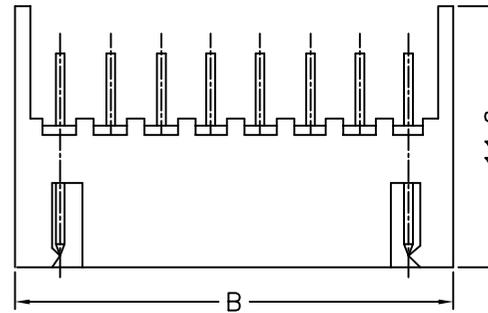
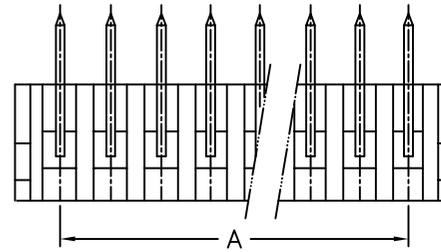


Straight Angle



Right Angle



Dimensions : mm

Circuits	Straight / Right Angle	
	A	B+0.2
4324-2S	2.50	7.50
4324-3S	5.00	10.0
4324-4S	7.50	12.50
4324-5S	10.00	15.00
4324-6S	12.50	17.50
4324-7S	15.00	20.00
4324-8S	17.50	22.50
4324-9S	20.00	25.00
4324-10S	22.50	27.50
4324-11S	25.00	30.00
4324-12S	27.50	32.50
4324-13S	30.00	35.00
4324-14S	32.50	37.50
4324-15S	35.00	40.00
4324-20S	47.50	52.50

Dimensions : mm

Circuits	Straight / Right Angle	
	A	B+0.2
4324-2R	2.50	7.50
4324-3R	5.00	10.0
4324-4R	7.50	12.50
4324-5R	10.00	15.00
4324-6R	12.50	17.50
4324-7R	15.00	20.00
4324-8R	17.50	22.50
4324-9R	20.00	25.00
4324-10R	22.50	27.50
4324-11R	25.00	30.00
4324-12R	27.50	32.50
4324-13R	30.00	35.00
4324-14R	32.50	37.50
4324-15R	35.00	40.00
4324-20R	47.50	52.50

SPECIFICATIONS

Available in 2 through 20 circuits

Insulator Material : Nylon 66 UL94V-0

Contact : 0.64mm(.025")tin plated square pin

Plating : G:Gold plated T: Tin plated

Type : S:Straight Type R:Right Angle Type

Color: Black,White.

Tolerance  $\pm 0.2$

 <b>易昕企業有限公司</b> <b>LEAMAX ENTERPRISE CO., LED.</b>					
PROJ	SCALE : F DO NOT SCALE DWG		MOLD NO 4324		
APP	AMY	93.11.10	MODEL	FILE NO WAFER P:2.5mm	REV. X1
CHK	CCJ	89.11.01			
DGN	WU	89.11.01	UNIT MM	SHT 1 OF 1	SIZE A4
DRW	SHIEH	89.11.01			