


Features:

- Material: Brass
- Tin-plated (Lead free)
- Used in 25003H-N/25404H-N/25405H-N series housings
- Wire range: AWG #22 ~ #26

Specification:

- Current rating: 3A
- Voltage rating: 250V AC, DC Max.
- Contact resistance: 20mΩ Max.
- Engagement force: 500g Max. with tin-plated .025"(0.64mm) square pin
- Disengagement Force: 87g Min. for first cycle with tin-plated .025"(0.64mm) square pin
- Terminal retention force: 1.5Kg Min.
- Crimp strength: #22 4.0 Kg Min.
#24 3.0 Kg Min.
#26 2.0 Kg Min.
- Ambient temperature range: -40°C ~ 105°C

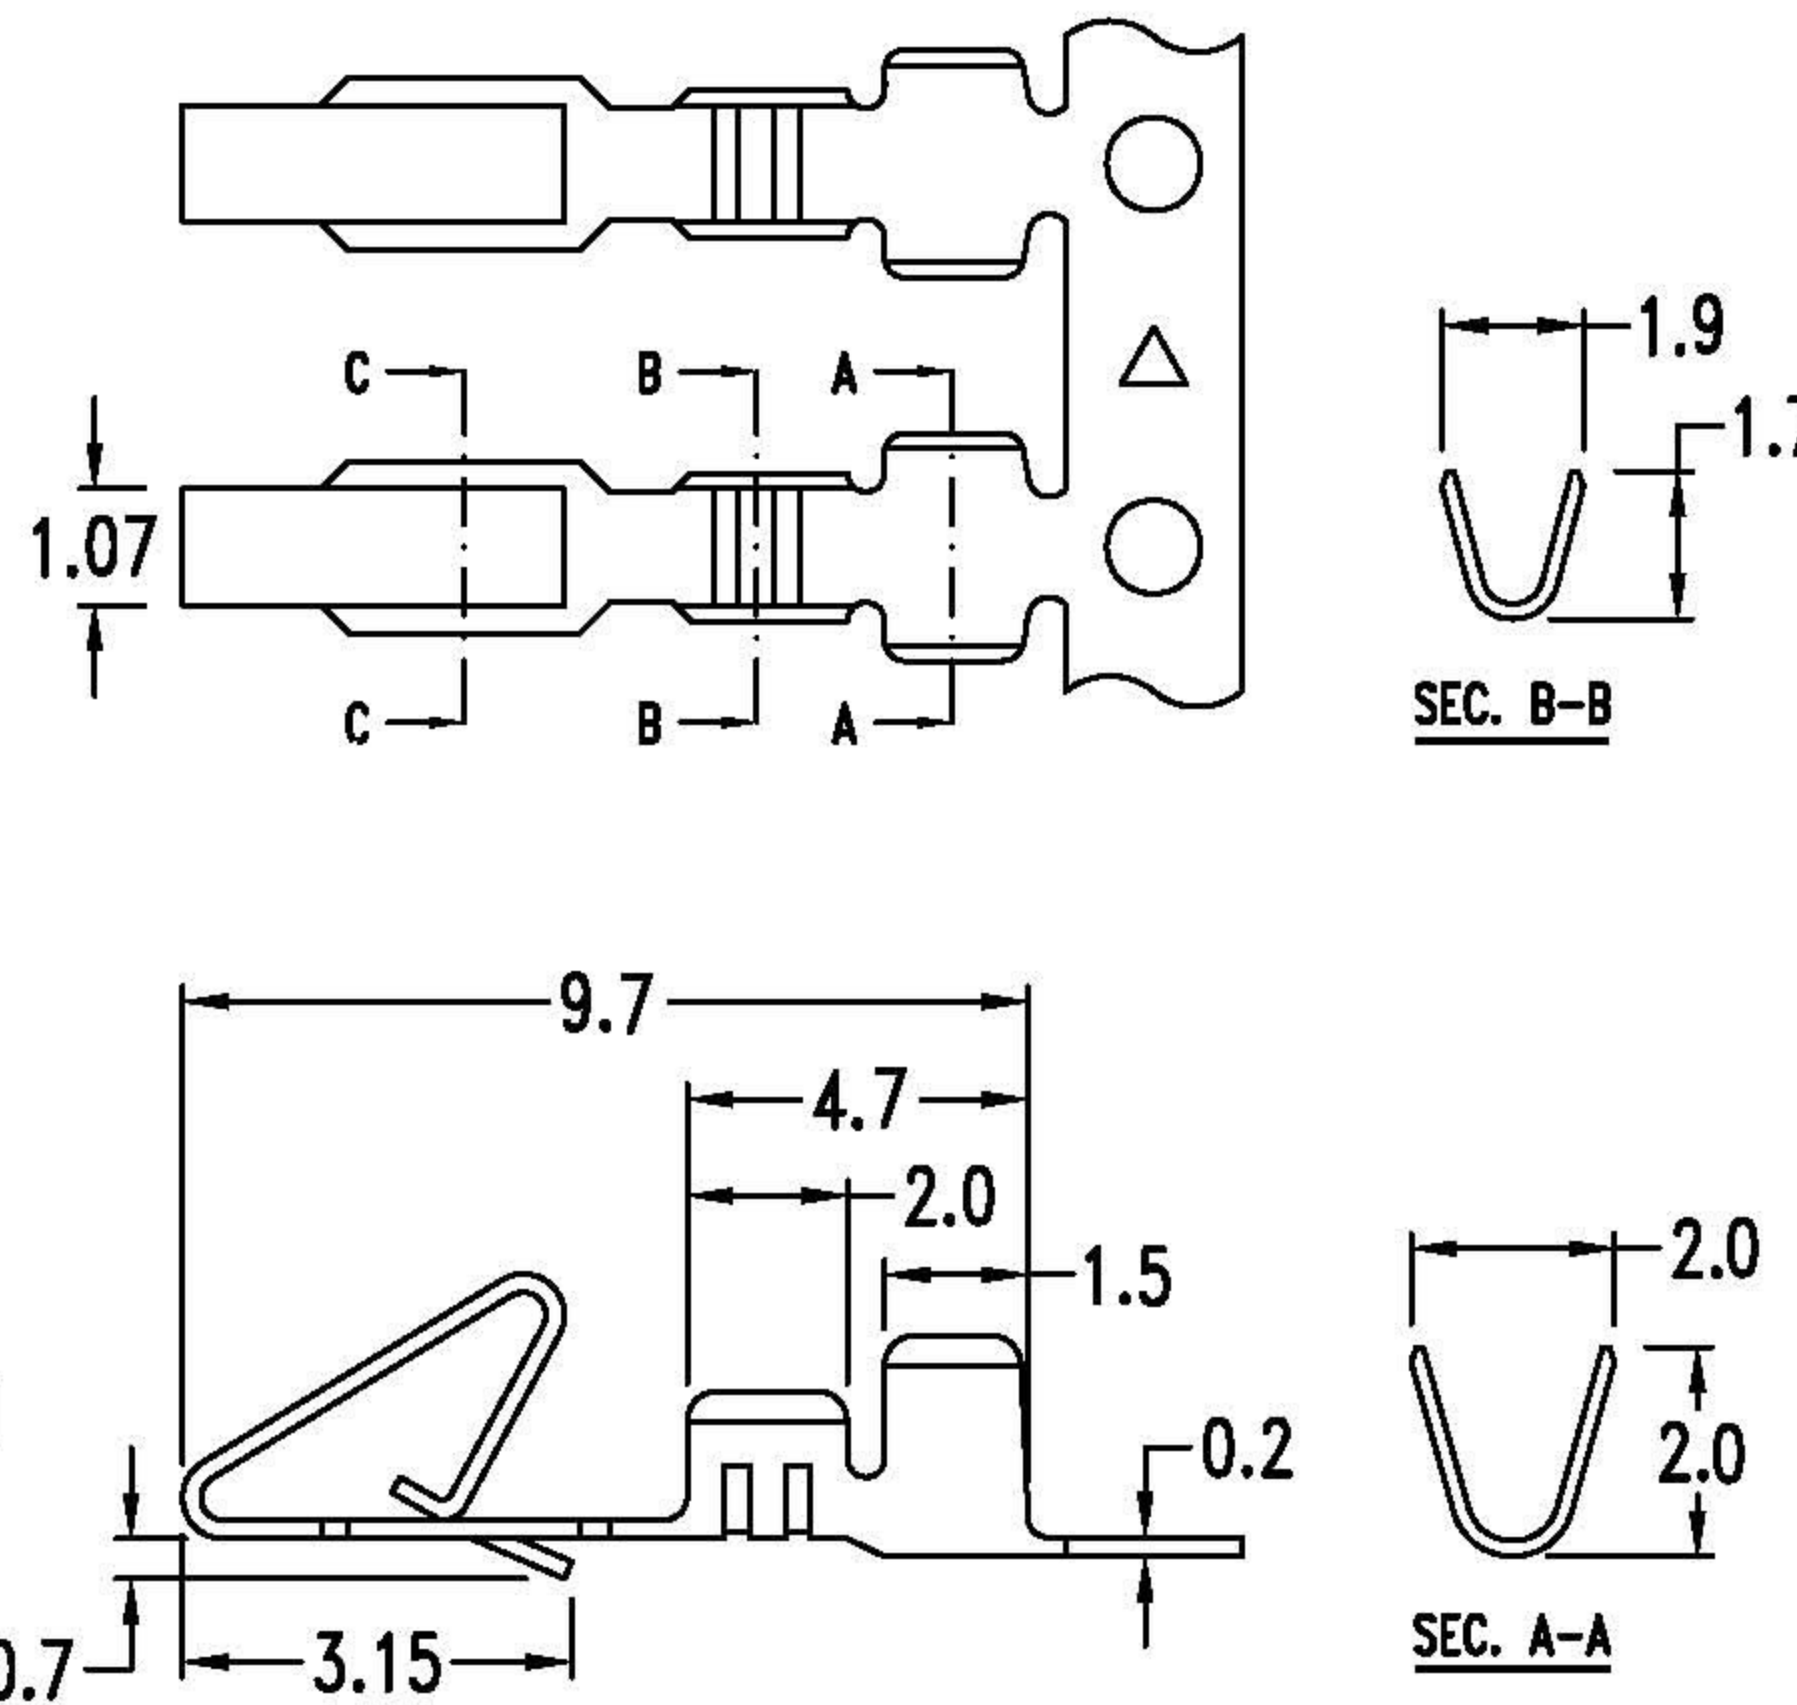

CUSTOMER APPROVAL

UNLESS OTHERWISE
SPECIFIED TOLERANCE

.000 ± 0.08 (mm)

.00 ± 0.25 (mm)

.0 ± 0.40 (mm)

UNIT:mm

Material:

Finish:

Q'ty:

APPROVAL

DRAWN:

DESIGNED:

CHECKED: Stella
2011/10/04

APPROVED: James
2011/10/04

DATE

2004
2/16

2004
2/16

2004
2/16

2004
2/16



易昕企業有限公司

LEAMAX ENTERPRISE CO., LTD

TITLE: .098"(2.5mm) Crimp Terminal

P/N: 4326TC

Eng. No.: 4326TC-001