

REV	ECN NO.	DESCRIPTION	DATE	APP'D
C/D		RELEASE TO PRODUCTION		Paul

Features:

- Material: Phosphor Bronze
- Used in 4312-2xxHFE Series Housing
- Wire range: #26 ~ #30 AWG
- Thickness: 0.2mm

Specifications:



- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A


- Voltage rating: 250V AC(RMS) or DC
- Contact resistance: 10mΩ max.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.
(carry rated current load)

Order Information

Part No.	Finished	Wire size	Dim. a	Dim. b	Dim. c	Dim. d
4312-MT	Tin-plated	#26 ~ #30 AWG	1.8	1.6	2.4	1.9

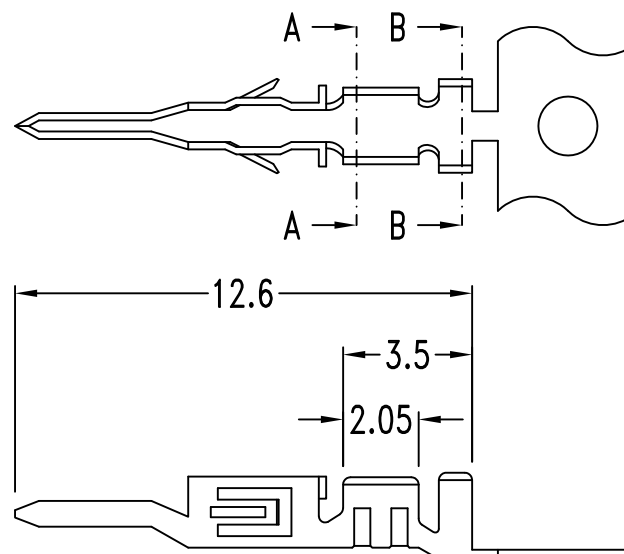

SEC. A-A



SEC. B-B

TOLERANCE	APPROVALS	DATE	易昕企業有限公司 LEAMAX ENTERPRISE CO., LTD.		
.000 ± 0.05 (mm) .00 ± 0.15 (mm) .0 ± 0.25 (mm)	DRAWN Daniel	29-07-00	TITLE: .118" (3.00mm) Crimp Terminal		
	CHK'D Huang	04-05-15			
	APP'D Chen	25-05-15	DWG NO.4312-TM1		
	UNTS mm	SCALE 1:1	SIZE:A4	SHEET 1 OF 1	REV. C/D